



Loads are tensile loads with highest screw diameter (recommended)
Screws are chipboard screws, higher loads (up to 30%), can be obtained by using traditional wood screws. Safety factor 3 is included.

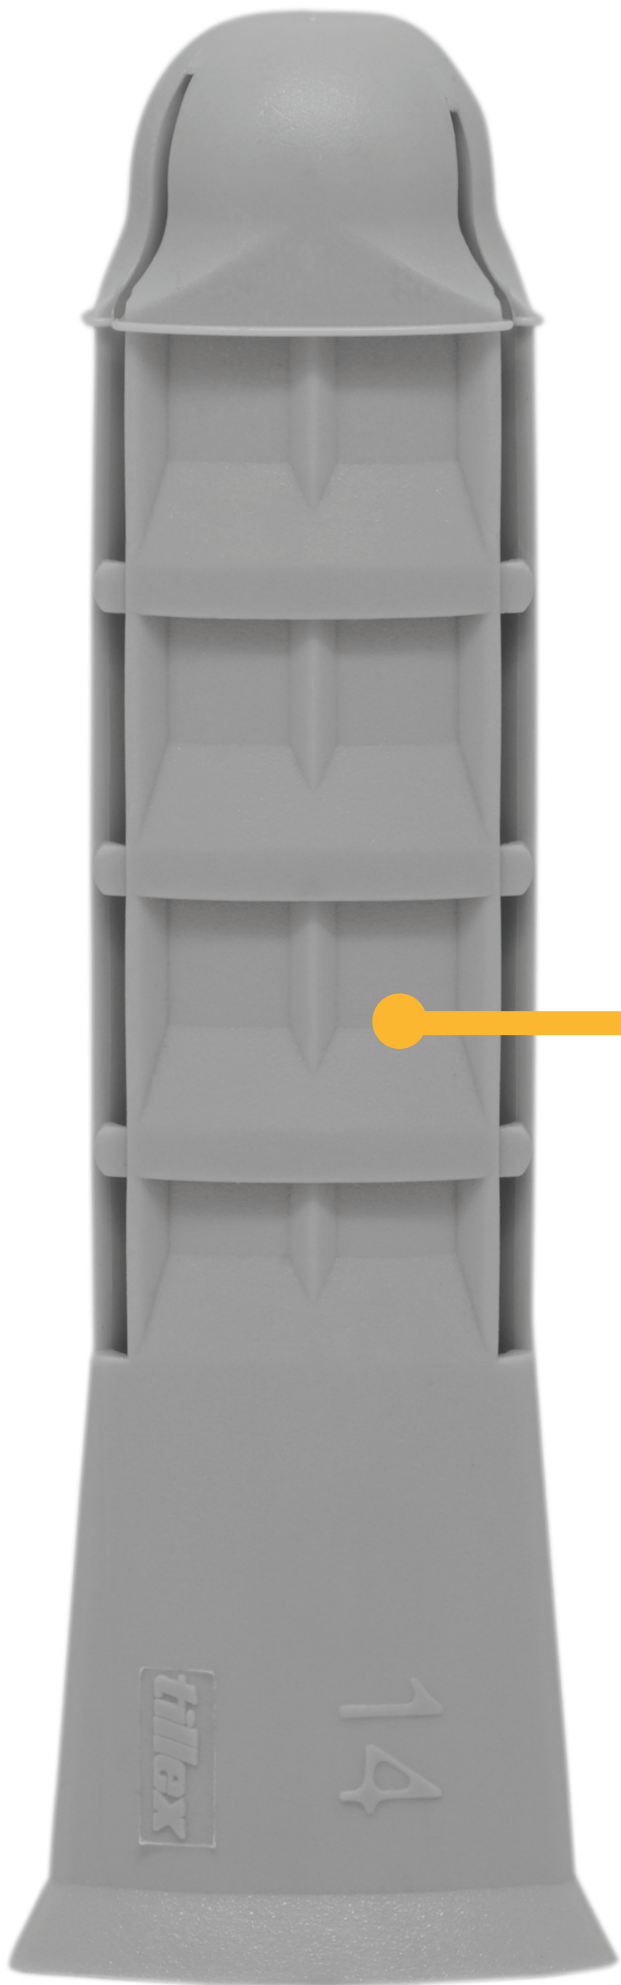

Loading capacity, kN (1kN ≈ 100 kg)	AP 10	AP 12	AP 14
Aerated concrete 525 kg/m3	0,7	0,85	1,15

AIRCRETE

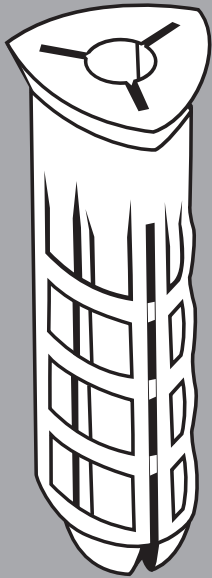

LECA BLOCKS



Triangular shape prevents fixing rotating in the drill hole

Type	Dimension (mm)	Colour	Min.drill hole depth	Drill Ø (mm) 	Screw Ø (mm) 	Pieces/ Box
AP 10	10x55	grey	65	10	5-6	50
AP 12	12x60	grey	70	12	8	40
AP 14	14x75	grey	85	14	10	20

The collar prevents plug disappearing in the drill hole
Adapted for wood, self-tapping and chipboard screws