

Grooved clips, GR-C

Snap-fit clip for flexible conduits and cables in channels

tillex[®]

Made in Denmark since 1974

TECHNICAL DATA SHEET

Product Description / Features

- Time-saving installation of flexible conduits and cables in milled wall grooves
- Tool-free installation: clip onto the conduit and press into the groove
- Secure fixation with easy removal and no damage to the wall
- No metal penetration of the masonry – no risk of rust marks through the wall
- Suitable for Ø16 mm and Ø20 mm pipes / conduits
- Can also be used for securing multiple cables
- Material: Impact resistant, UV-stabilized polypropylene (PP), halogen free.
- Environmental Information: Product is registered in the official **EPD Denmark** database.
- Manufactured in Denmark


epd danmark





Easy Installation

- Cut a channel in the wall using a channel cutter
- Attach the clip to the conduit
- Press the clip into the channel until it locks - installation complete ✓

GR-C16 / GR-C20:

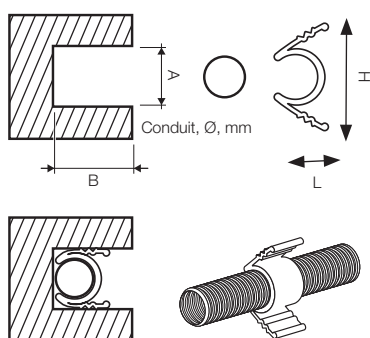

GR-C 2x10:

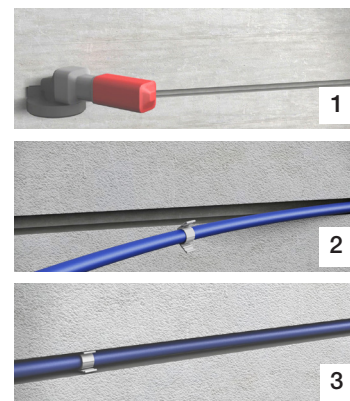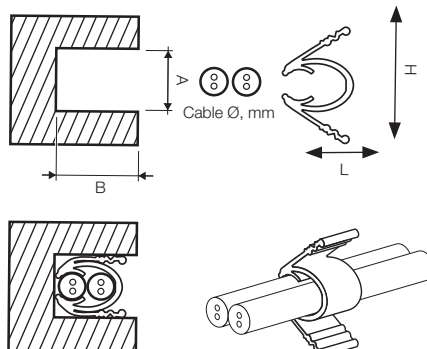

Technical Information

Type	Colour	Conduit, mm.	Weight, g.	Recommended groove dimensions, mm		Dim. L, mm.	Dim. H, mm.
				Width, Dim. A, mm.	Depth, Dim. B, mm.		
GR-C 16	grey	16	1,67	23	30	20,4	36
GR-C 20	grey	20	1,81	28	35	21,8	41,2
GR-C 2x10	grey	2x10	2,22	23	30	24	35,5

Product range / Packaging Information



Type	Ref. No. Crt.	EAN Crt.	Ref. No. Bucket	EAN XXL Bucket	Colour	QTY / Crt.	QTY / XXL Bucket
GR-C 16	120144	5701925120044	120143	5701925120143	grey	100	1500
GR-C 20	120168	5701925120068	120167	5701925120167	grey	80	1200
GR-C 2x10	120020	5701925120020	120129	5701925120129	grey	100	1200