

TECHNICAL DATA SHEET

PLUGS CLIPS DOUBLE, ROUND LEAD

tillex[®]

MADE IN DENMARK SINCE 1954

Plastmaterial: High impact elastic polypropylene - halogen free and UV-stabilized.

Nail: Hardened steel nails, **Corrosion Class C4.**

Can be installed both indoors and outdoors.





INSTALLATION

- For installation on flat surfaces.
- Drill hole with 5.5-6 mm drill, mount plugs clip and hit the nail in.
- Suitable for brick and concrete.



DIMENSIONS

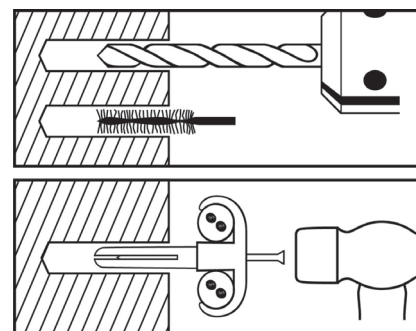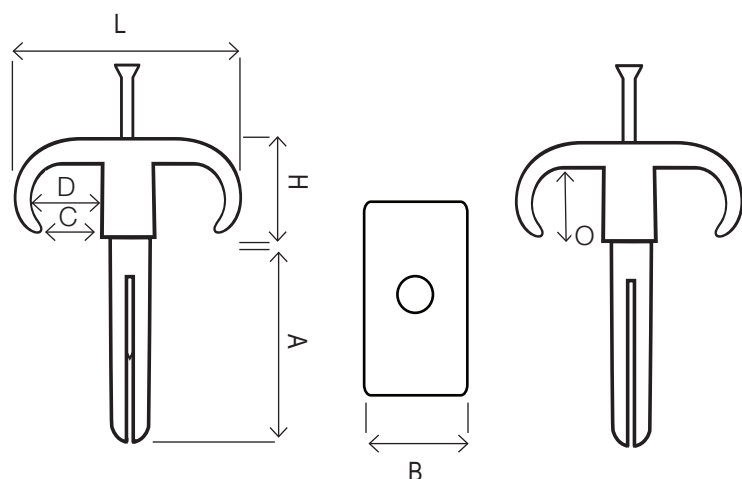

PRODUCT RANGE (BOXES)

Ref. nr.	Type	Nail. mm	Colour	Dim.L mm	Dim.B mm	Dim.H mm	Dim.A mm	Dim.C mm	Dim.D mm	Dim.O mm	Drill Ø, mm	QTY box
106406	PC-D 14-18 C	2,5x40	clear	37,3	13,9	17,8	21,1	9,5	13,0	15,0	5,5-6 mm	60
106413	PC-D 14-18 W	2,5x40	white	37,3	13,9	17,8	21,3	9,5	13,0	15,0	5,5-6 mm	60
106420	PC-D 14-18 G	2,5x40	grey	37,3	13,9	17,8	21,1	9,5	13,0	15,0	5,5-6 mm	60
106437	PC-D 14-18 DG	2,5x40	dark grey	37,3	13,9	17,8	21,1	9,5	13,0	15,0	5,5-6 mm	60
108417	PC-D 18-22 C	2,5x45	clear	46,2	13,8	22,8	21,2	11,0	17,0	19,0	5,5-6 mm	40
108400	PC-D 18-22 W	2,5x45	white	46,2	13,8	22,8	21,2	11,0	17,0	19,0	5,5-6 mm	40
108431	PC-D 18-22 G	2,5x45	grey	46,2	13,8	22,8	21,2	11,0	17,0	19,0	5,5-6 mm	40
108448	PC-D 18-22 DG	2,5x45	dark grey	46,2	13,8	22,8	21,2	11,0	17,0	19,0	5,5-6 mm	40

PRODUCT RANGE (XXL BUCKET)



Ref. nr.	Type	Nail. mm	Colour	Dim.L mm	Dim.B mm	Dim.H mm	Dim.A mm	Dim.C mm	Dim.D mm	Dim.O mm	Drill Ø, mm	QTY bucket
107403	PC-D 14-18 C	2,5x40	clear	37,3	13,9	17,8	21,1	9,5	13,0	15,0	5,5-6 mm	800
107410	PC-D 14-18 W	2,5x40	white	37,3	13,9	17,8	21,1	9,5	13,0	15,0	5,5-6 mm	800
107427	PC-D 14-18 G	2,5x40	grey	37,3	13,9	17,8	21,1	9,5	13,0	15,0	5,5-6 mm	800
107434	PC-D 14-18 DG	2,5x40	dark grey	37,3	13,9	17,8	21,1	9,5	13,0	15,0	5,5-6 mm	800
109414	PC-D 18-22 C	2,5x45	clear	46,2	13,8	22,8	21,2	11,0	17,0	19,0	5,5-6 mm	600
109407	PC-D 18-22 W	2,5x45	white	46,2	13,8	22,8	21,2	11,0	17,0	19,0	5,5-6 mm	600
109438	PC-D 18-22 G	2,5x45	grey	46,2	13,8	22,8	21,2	11,0	17,0	19,0	5,5-6 mm	600
109445	PC-D 18-22 DG	2,5x45	dark grey	46,2	13,8	22,8	21,2	11,0	17,0	19,0	5,5-6 mm	600